

Type: **Cooling Cabinet**

Technical description:


**BOLARUS EX C700**



Dimm.	[mm]	Length	Width	Height
External		692	840	min. 2075
Internal		534	700	1457

Capacity:	543 [dm <sup>3</sup> ]
Bare weight:	120 [kg]
Loading:	90 [kg]
Max loading for shelf:	30 [kg]
Temperature range:	-2... -8 [°C]
Service conditions:	+18... +38 [°C] 60% HR
Rated power:	420 [W]
Cooling power:	630 [W]
Refrigerant:	R-404a or R-290 [optional]
Power requirement:	1,008 [kWh/24h]
Power supply:	230/50 [V/Hz]
No. of doors:	1

**Standard equipment:**

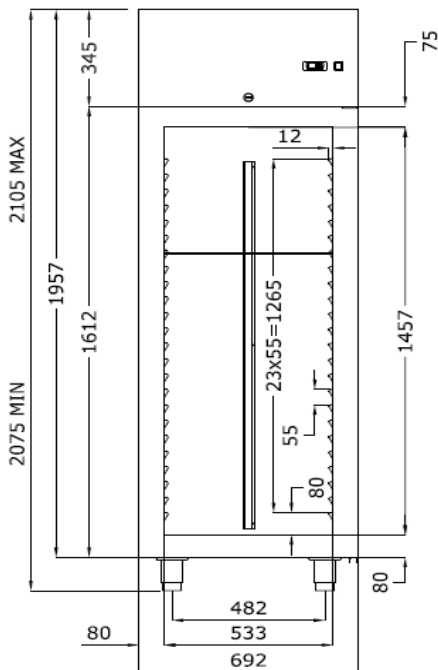

- Highest efficiency - power consumption only 1,008 kWh/24h
- Innovative 24 rib-guide shelf system integrated with interior
- Fan placed outside the cooling chamber - monoblock construction
- Exterior and interior made from stainless steel AISI 304
- 80 mm insulation
- Fully hygienic interior with embossed bottom and drain
- GN 2/1 norm
- Automatic defrost and evaporation system
- 3 metal coated shelves
- Electronic control with digital display of temperature
- Self closing door
- Easily replaceable magnetic door gasket
- Interior with led light
- Door lock
- Regulated legs

