



# SOFTCOOKER S - SR

*cottura a bassa temperatura  
low temperature cooking*

- Apparecchio per la cottura a bassa temperatura con riscaldamento statico dell'acqua.
- Struttura in acciaio inox, vasca di cottura gastronomico in acciaio inox.
- Pratiche maniglie per il trasporto della vasca.
- Potenti resistenze corazzate a contatto del fondo della vasca.
- Sistema elettronico di controllo della temperatura con visualizzazione della temperatura e del tempo di esercizio.
- Stesso sistema di controllo del Softcooker con  $\Delta T$  di 0,2°C.
- 5 programmi memorizzabili.
- Temperatura selezionabile in °C e °F.
- Coperchio vasca fornito di serie.
- Versione R con rubinetto per lo scarico dell'acqua.

- *Low temperature cooking device with water static heating.*
- *Stainless steel structure and 1/1 GN made of stainless steel*
- *Practical handles to carry it easily*
- *Powerful shock-proof coated heating elements in contact with tank bottom*
- *Electronic control system of the temperature with working temperature display*
- *Same control system of Softcooker with  $\Delta T$  of 0,2°C.*
- *5 storable programs*
- *Temperature setting in °C and °F.*
- *Equipped with lid*
- *R version with tap for discharging water.*



**SOFTCOOKER S 1/1 GN**  
1.coperchio standard  
standard lid



**SOFTCOOKER S 2/3 GN**  
2.coperchio standard  
standard lid



SOFTCOOKER S 2/3 GN




SOFTCOOKER S 1/1 GN



**SOFTCOOKER SR 1/1 GN**  
4.coperchio standard  
standard lid

**SOFTCOOKER SR 2/3 GN**  
3.coperchio standard  
standard lid

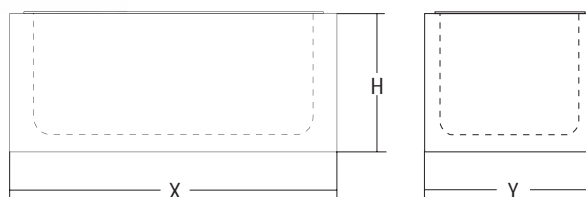

	Potenza Power Spannung Puissance	Alimentazione Power source Betriebsspannung Alimentation	Temperatura Temperature Temperatur	Capacità vasca Bowl capacity Becken Kapazität Capacité cuve	Capienza utile vasca Bowl filling level Becken Nutzfläche Kapazität Capacité utile cuve	X	Y	H	Peso netto Net weight Nettogewicht Poids net	Dimensioni imballo Shipping Verpack abmessungen Dim. emballage	Peso lordo Gross weight Brutogewicht Poids brut
	watt		°C	lt	lt	mm	mm	mm	kg	mm	kg
<b>Softcooker S - 2/3 GN</b>	1150	230V/50Hz	24 ÷ 99	16,5	14	390	360	300	5	600x500x420	9
<b>Softcooker SR - 2/3 GN</b>	1150	230V/50Hz	24 ÷ 99	19	17	400	370	300	5,5	600x500x420	9
<b>Softcooker S - 1/1 GN</b>	1700	230V/50Hz	24 ÷ 99	26,5	22	565	360	300	16	600x500x420	20
<b>Softcooker SR - 1/1 GN</b>	1700	230V/50Hz	24 ÷ 99	29	25	575	370	300	16,5	600x500x420	20



**SOFTCOOKER SR 2/3 GN**

**SOFTCOOKER SR 1/1 GN**